




Data sheet | Item number: 221-613

COMPACT Splicing Connectors; 3-conductor connector; with operating levers; Max.ambient operating temp. 85 °C

[www.wago.com/221-613](http://www.wago.com/221-613)

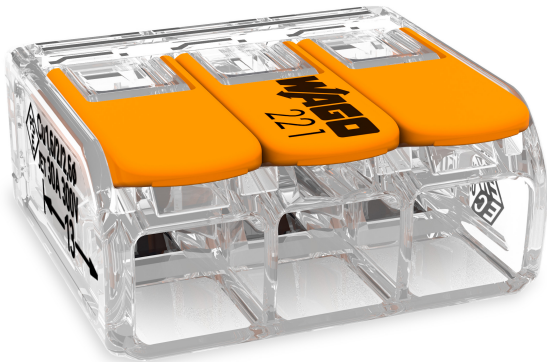

## Data

### Electrical data

Ratings per	EN 60664
Rated voltage (II / 2)	450 V
Rated impulse voltage (II / 2)	4 kV
Rated current	41 A
Legend (ratings)	(II / 2) $\triangleq$ Overvoltage category II / Pollution degree 2



## Connection data

Connection technology	CAGE CLAMP®
Actuation type	Operating lever
Connectable conductor materials	Copper
Nominal cross section	6 mm <sup>2</sup>
Solid conductor	0.5 ... 6 mm <sup>2</sup> / 20 ... 10 AWG
Stranded conductor	0.5 ... 6 mm <sup>2</sup> / 20 ... 10 AWG
Fine-stranded conductor	0.5 ... 6 mm <sup>2</sup> / 20 ... 10 AWG
Strip length	12 ... 14 mm / 0.47 ... 0.55 Inch
Total number of connection points	3
Total number of potentials	1
Type of wiring	Side-entry wiring

## Geometrical Data

Width	22.9 mm / 0.902 Inch
Height	10.1 mm / 0.398 Inch
Depth	21.1 mm / 0.831 Inch

## Material Data

Color	transparent
Flammability class per UL94	V2
Weight	4.014 g


## Environmental Requirements

Ambient temperature (operation)	85 °C
Continuous operating temperature up to	105 °C
T-Marking per EN 60998	T85

## Commercial data

Country of origin	DE
GTIN	4055143715416
Customs Tariff No.	85369010000

### Country specific Approvals

Logo	Approval	Certificate name
	KEMA/KEUR DEKRA Certification B.V.	71-101850

Subject to changes.